

Product information

Stuffing-Box-Packing Type 2026

Material composition

Diagonally braided from textured glass-fibre yarn, impregnated throughout with PTFE-dispersion and a silicone-free break-in lubricant.

Please note: the colour of the actual product might vary from the image on this data-sheet.

Properties

Very dense and supple packing, good chemical resistance.

Application areas

TEADIT style 2026 is recommended for use in rotary and reciprocating pumps, valves, mixers and agitators etc. in the pulp- and paper, petroleum, chemical and food industry. Also suitable for sugar mills and water treatment plants.

Application media


Style 2026 can be used with water, steam, solvents, oils, most chemicals, mild acids and lyes, etc.

Not suitable for

Concentrated acids and lyes, oxygen.

Benefits

Style 2026 is a multi-service packing suitable for a wide variety of applications throughout a plant.

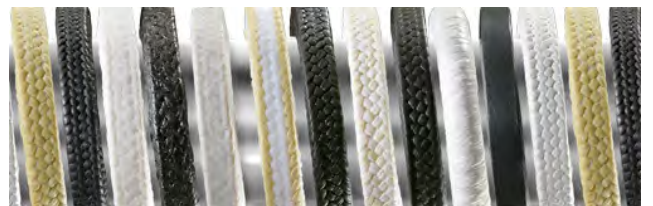

Temperature:

	- temp	+ temp
(°C)	40	280

Pressure:

	rotating:	reciprocating:	static:
(bar)	15	20	150

pH: 3-12 density: 2 v: (m/s) 8

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the colour of the actual product might vary from the above image on this data-sheet.

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, austria@teadit.eu, www.teadit.eu
 TEADIT Deutschland - Schanzenstr. 35, 51063 Cologne, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, germany@teadit.eu