

Stuffing-Box-Packing Type 2808

Material composition

Diagonally braided from acrylic fibre, impregnated throughout with pure graphite powder and an inert lubricant.

Please note: the colour of the actual product might vary from the above image on this data-sheet.

Properties

Style 2808 is a dense, yet soft and pliable packing with good heat transmitting properties. The combination of the synthetic fibre, pure graphite powder and a high-temperature break-in lubricant results in a packing with very low shaft wear and good durability.

Application areas

Multi-purpose packing which can be used for dynamic and static applications in pumps, mixers, kneaders and valves in all sorts of industries.

Application media


TEADIT style 2808 covers a wide variety of media like water, brine, mild acids and lyes, most chemicals, abrasive substances etc.

Not suitable for

Concentrated acids and lyes, oxygen.

Benefits

Economical all-round packing for many applications within a plant, not shaft scouring.

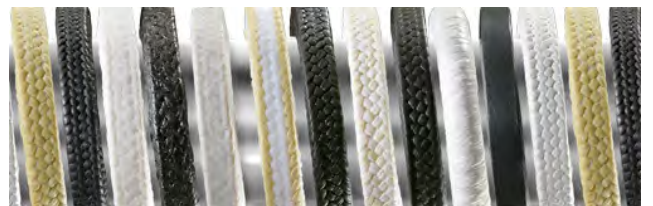

Temperature:

	- temp	+ temp
(°C)	100	230

Pressure:

	rotating:	reciprocating:	static:
(bar)	20	20	50

pH: 4-10 density: 1,1 v: (m/s) 10