




Sealing Devices

Queensland

Type 6

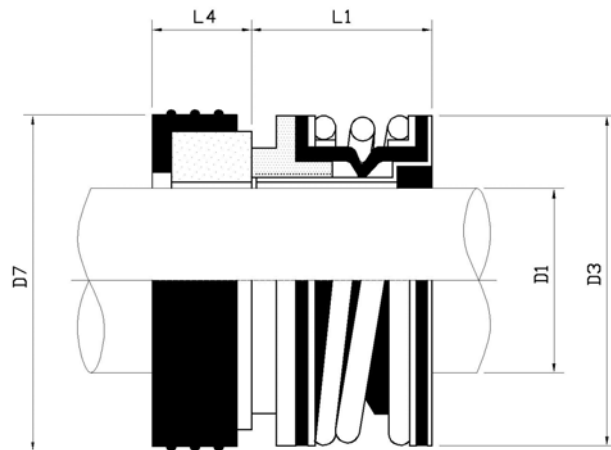

D1(IN)	D3	D7	L1	L4	L=L1+L4
0.375	24	22.2	16.7	6.3	23
0.500	27	25.4	16.7	8	24.7
0.625	31	31.75	18.3	10.3	28.6
0.750	35	34.95	18.3	10.3	28.6
1.000	43.5	41.3	20.7	11	31.7

Operating Conditions

Temperature: -30°C to +200°C
(Depending on materials used)

Pressure: Up to 5 bar, 75 psi

Speed: Up to 5m/s, 1000rpm

Materials available

Seal face: carbon, ceramic, sic

Elastomer: nitrile, viton

Equivalent to

T6, T16, BO4